




lennifer / 55005

Dual Density Polyurethane Sole

SABS

tra-fr

Manufactured with direct injection-moulded dual density polyurethane for more comfort and protection in heavy industrial environments.

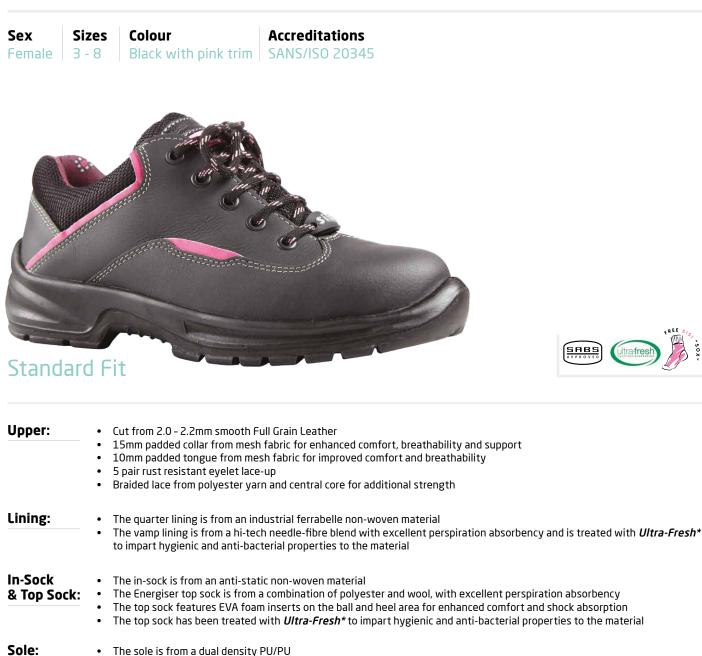

- The midsole is from a low density flexible Polyurethane with a shore hardness of 0.45mm 0.50mm
 - The outer sole is from Polyurethane with a shore hardness of 0.64mm 0.65mm
 - A shank reinforcement is moulded into the midsole for additional arch support
 - This shoe can withstand temperatures of up to 95°C
 - This shoe is anti-static
 - If required, this shoe is available with an APT midsole 55605

Toe Cap: Steel toe cap

Can withstand an impact load of 200 joules

The Jennifer shoe has been tested to comply with SANS/ISO 20345 specifications and carries the SANS/ISO 20345 certified mark

This product is manufactured in South Africa by BBF Safety Group (Pty) Ltd. in an ISO 9001:2000 accredited factory. NRCS/9002/287766/0153 **FEBRUARY 2020**